



sugarsandquilt.co.


Clutch Bag for Flow Forward NJ

by Becca Fenstermaker

- exterior fabric:** (1) 10" x 18"
- lining fabric:** (1) 10" x 18"
- fusible fleece or batting:** (1) 10" x 18"
- other supplies:** (1) snap, button, or hook and loop fastener




exterior




lining


1. Place the fusible fleece or batting on the wrong side of the exterior fabric. If using fusible fleece, iron it to the exterior fabric according to the manufacturer's instructions. If using batting, baste and quilt the exterior fabric and batting only.
2. Stack the exterior fabric and lining fabric right sides together (RST), lining up the edges.
3. Use the provided template or trace a round object (such as a bowl) to mark curves on one short end of the fabric stack. Cut the curves.

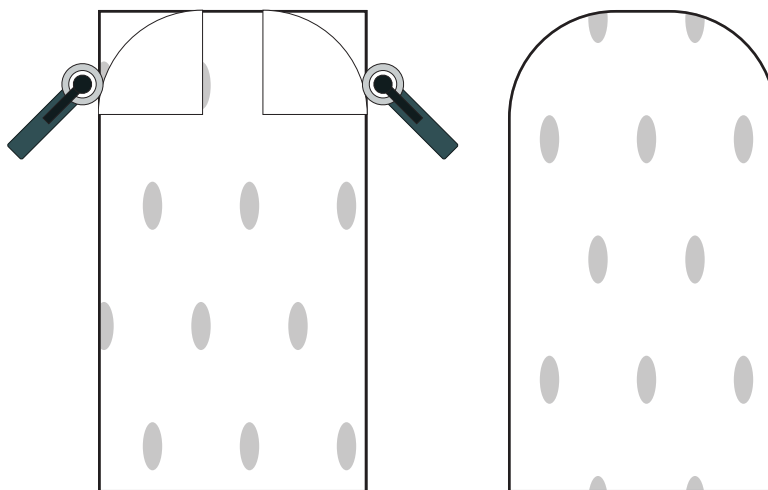


4. Use a 1/2" seam allowance to sew along the short square edge. Leave a 3" gap for turning and backstitch at the sides.

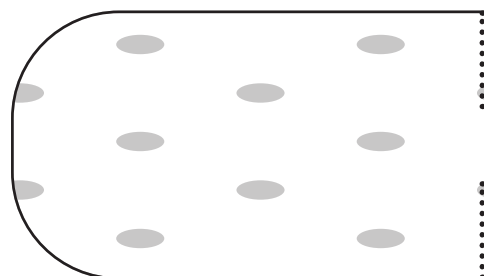


5. Flip the fabrics so they're wrong sides together (WST) and the right sides are facing out. Match the edges of the fabric and press the seam.

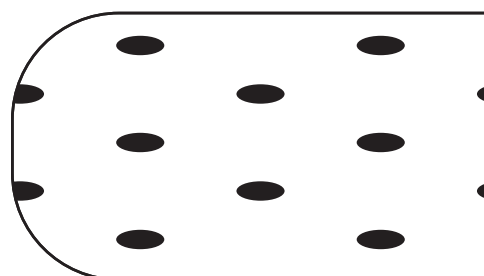


6. With the lining side facing up, measure 6" from the square edge and fold to create a pocket.

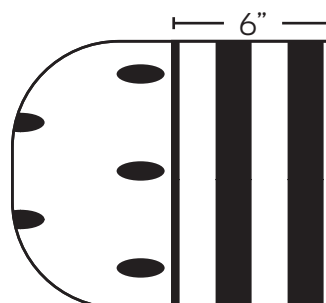


7. Keep the pocket in place and unfold the exterior fabric.

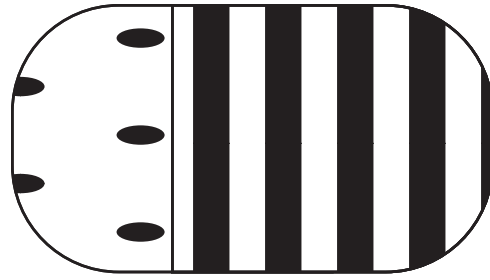

8. Fold the exterior fabric around so it's RST with the lining fabric. Line up the curved corners and finger press the exterior fabric at the fold. Pin or clip along all sides.

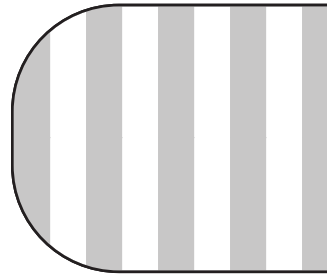

9. Use a 1/2" seam allowance to sew along the sides and the curved edge. Backstitch at the start and finish.

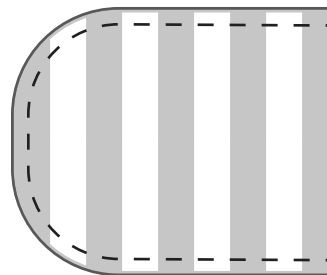

10. Trim or clip the seam allowance around the curved corners to about 1/4".

11. Turn the pouch right side out through the gap in the bottom. Press all of the seams.

12. Topstitch the gap closed and continue topstitching all around the curved flap.

13. Add the closure of your choice.

